

# „Akce digitální posuvky s ochranou IP67“

( prosinec 2016 )



## micrates

Prodej a servis měřicí techniky.

Tel: 776 182 329, 739 070 339


e-mail: [info@micrates.cz](mailto:info@micrates.cz)

http: [www.micrates.cz](http://www.micrates.cz)

---

### Posuvné měřítko 150 mm, IP67

- ochrana IP67
- číslcový krok 0,01 mm
- velký displej - velikost číslic 11 mm
- hloubkoměrný můstek 75 mm zdarma (č.0220 705)
- Kalibrační list výrobce zdarma

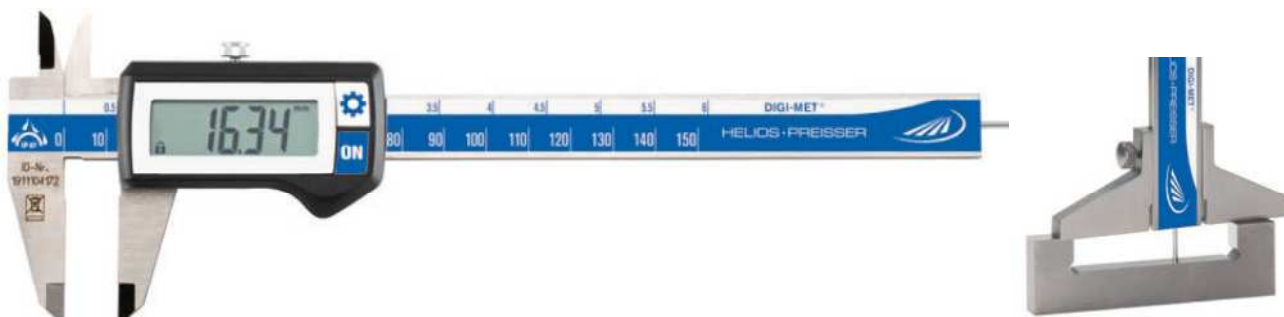

S kulatým hloubkoměrem, obj.č. 1326 416,

S plochým hloubkoměrem, obj.č. 1326 417,


Katalogová cena: 152 Eur / 4 180,- Kč

Cena po slevě **-25%: 114 Eur / 3 135,- Kč** bez DPH

---

### Posuvné měřítko 200 mm, IP67

- ochrana IP67
- číslcový krok 0,01 mm
- velikost číslic 7,5 mm
- s plochým hloubkoměrem

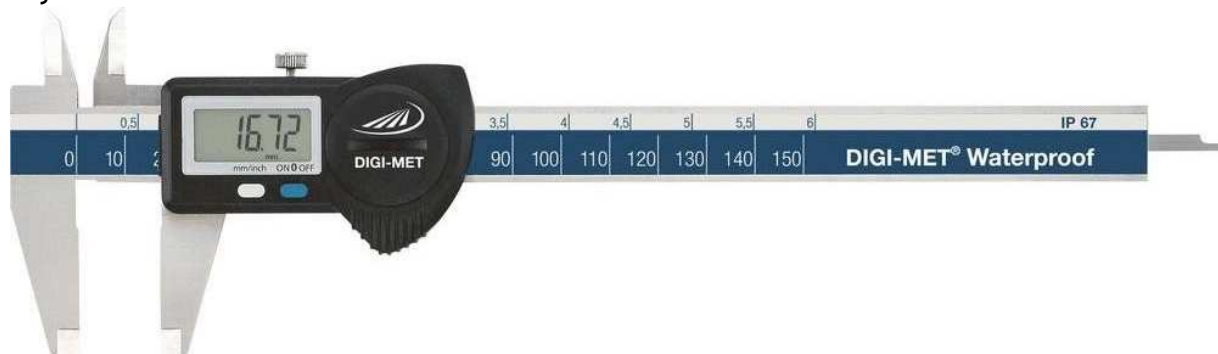

obj.č. 1226 418,

Katalogová cena: 205 Eur / 5 638,- Kč

Cena po slevě **-35%: 133,25 Eur / 3 664,- Kč** bez DPH  
(doprodej)

---



## 1326 DIGI-MET® Pocket calipers IP67



### Specification

- Meas. system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Electronic functions

- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

### Shipment

- Plastic case

|                                           |  | Measuring range |      | Jaw length |      | Reading |       | Depth gauge | Ref. No. | List price<br>Euro |
|-------------------------------------------|--|-----------------|------|------------|------|---------|-------|-------------|----------|--------------------|
|                                           |  | mm              | inch | mm         | inch | mm      | inch  |             |          |                    |
| ▪                                         |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1326 416 | 152.00             |
| ▪                                         |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | rectangular | 1326 417 | 152.00             |
| ▪                                         |  | 200             | 8    | 50         | 2.00 | 0.01    | .0005 | rectangular | 1326 418 | 211.00             |
| ▪                                         |  | 300             | 12   | 65         | 2.50 | 0.01    | .0005 | without     | 1326 422 | 267.00             |
| <b>With carbide tipped measuring jaws</b> |  |                 |      |            |      |         |       |             |          |                    |
|                                           |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1326 914 | 317.00             |

### Accessories

Battery, 3V-Lithium, CR 2032

### Ref. No.

0220 704

### List price Euro

3.60

## 1326 DIGI-MET® Pocket calipers IP67 with data output



### Specification

- Protection class IP67
- Measuring system is insensitive to fluids and cooling agents
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Electronic functions

- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

### Shipment

- Wooden case

|                              |  | Measuring range |      | Jaw length |      | Reading |       | Depth gauge | Ref. No.        | List price<br>Euro         |
|------------------------------|--|-----------------|------|------------|------|---------|-------|-------------|-----------------|----------------------------|
|                              |  | mm              | inch | mm         | inch | mm      | inch  |             |                 |                            |
| ▪                            |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1326 516        | 152.00                     |
| ▪                            |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | rectangular | 1326 517        | 152.00                     |
| ▪                            |  | 200             | 8    | 50         | 2.00 | 0.01    | .0005 | rectangular | 1326 518        | 222.00                     |
| <b>Accessories</b>           |  |                 |      |            |      |         |       |             | <b>Ref. No.</b> | <b>List price<br/>Euro</b> |
| Battery, 3V-Lithium, CR 2032 |  |                 |      |            |      |         |       |             | 0220 704        | 3.60                       |
| Cable for USB incl. software |  |                 |      |            |      |         |       |             | 1998 720        | 66.00                      |
| Cable for RS 232             |  |                 |      |            |      |         |       |             | 1997 501        | 46.20                      |
| Cable for Digimatic          |  |                 |      |            |      |         |       |             | 1998 501        | 59.00                      |



## 1322 DIGI-MET® Pocket caliper PRISMA



1

### Specification

- Double prisma guide with excellent sliding characteristics
- Protection class IP67
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement

### Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

### Shipment

- Wooden case

|  |  | Measuring range |      | Jaw length |      | Reading |       | Depth gauge | Ref. No. | List price<br>Euro |
|--|--|-----------------|------|------------|------|---------|-------|-------------|----------|--------------------|
|  |  | mm              | inch | mm         | inch | mm      | inch  |             |          |                    |
|  |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1322 516 | 195.00             |

### Accessories

|                              | Ref. No. | List price<br>Euro |
|------------------------------|----------|--------------------|
| Battery, 3V-Lithium, CR 2032 | 0220 704 | 3.60               |
| Cable for USB incl. software | 1998 720 | 66.00              |
| Cable for RS 232             | 1997 501 | 46.20              |
| Cable for Digimatic          | 1998 501 | 59.00              |

## Depth attachment base





### Specification

- Stainless steel
- Suitable for all pocket calipers
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm

### Shipment

- Cardboard box




|                       | Ref. No. | List price<br>Euro |
|-----------------------|----------|--------------------|
| Depth attachment base | 0220 705 | 20.70              |



## 1226 DIGI-MET® Pocket calipers IP67

**HP**

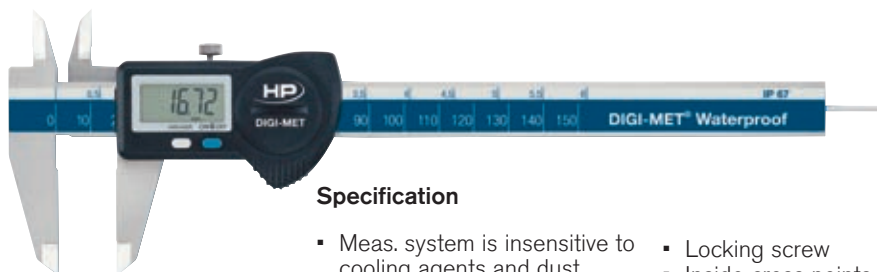

**DIN  
862**

### Specification

- Meas. system is insensitive to cooling agents and dust
- Protection class IP 67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Electronic functions

- ON/OFF switch
- QuickLock Function
- QuickStart Electronic
- Zero setting at any position
- mm/inch conversion

### Shipment

Plastic case

|                                           |   |  | Measuring range |      | Jaw length |      | Reading |       | Depth gauge | Ref. No. | List price<br>Euro |
|-------------------------------------------|---|--|-----------------|------|------------|------|---------|-------|-------------|----------|--------------------|
|                                           |   |  | mm              | inch | mm         | inch | mm      | inch  |             |          |                    |
| ■                                         | ■ |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1226 416 | 148.00             |
| ■                                         | ■ |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | rectangular | 1226 417 | 148.00             |
| ■                                         | ■ |  | 200             | 8    | 50         | 2.00 | 0.01    | .0005 | rectangular | 1226 418 | 205.00             |
| ■                                         | ■ |  | 300             | 12   | 65         | 2.50 | 0.01    | .0005 | without     | 1226 422 | 259.00             |
| <b>With carbide tipped measuring jaws</b> |   |  |                 |      |            |      |         |       |             |          |                    |
|                                           |   |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | Ø 1.5 mm    | 1226 914 | 308.00             |

### Accessories

Battery, 3V-Lithium, CR 2032

### Ref. No.

0220 704

### List price Euro

3.50

## 0220 DIGI-MET® Pocket calipers IP65 with data output

**HP**



**DIN  
862**

### Specification

- Protection class IP 65
- Measuring system is insensitive to fluids and cooling agents
- Stainless steel
- LCD display 6 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Shipment

- Wooden case

### Electronic functions

- ON/OFF switch
- QuickStart Function
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function

|                                          |   |  | Measuring range |      | Jaw length |      | Reading |       | Depth gauge | Ref. No.        | List price<br>Euro         |
|------------------------------------------|---|--|-----------------|------|------------|------|---------|-------|-------------|-----------------|----------------------------|
|                                          |   |  | mm              | inch | mm         | inch | mm      | inch  |             |                 |                            |
| ■                                        | ■ |  | 150             | 6    | 40         | 1.57 | 0.01    | .0005 | rectangular | 0220 721        | 148.00                     |
| ■                                        | ■ |  | 200             | 8    | 40         | 1.57 | 0.01    | .0005 | rectangular | 0220 723        | 216.00                     |
| <b>Accessories</b>                       |   |  |                 |      |            |      |         |       |             | <b>Ref. No.</b> | <b>List price<br/>Euro</b> |
| Battery, 3V-Lithium, CR 2032             |   |  |                 |      |            |      |         |       |             | 0220 704        | 3.50                       |
| Cable for Opto to RS 232                 |   |  |                 |      |            |      |         |       |             | 0996 701        | 69.00                      |
| Cable for Opto to USB                    |   |  |                 |      |            |      |         |       |             | 0996 705        | 132.00                     |
| USB-keyboard interface cable Opto RS 232 |   |  |                 |      |            |      |         |       |             | 0997 770        | 225.00                     |

