


Absolute digital calipers

Calipers with an absolute measuring system. This gives you the advantage that the caliper stores the one-time setting of the absolute zero position until the battery has to be changed. This reduces the chance of measuring errors and enables you to use the caliper without zero setting.

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- ABS/INC switchable.
- On/off switch.
- Max. measuring speed: 1.5 m/s.
- Power supply: 1 battery (V357).

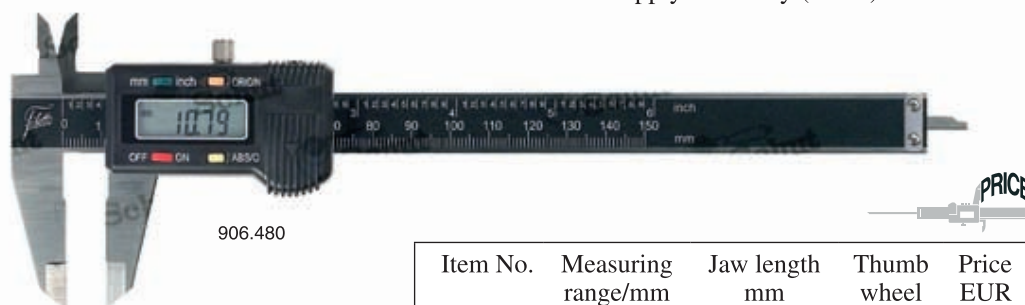

906.480



Item No.	Measuring range/mm	Jaw length mm	Thumb wheel	Price EUR
906.480	0 - 150	40	no	
906.481	0 - 200	50	yes	
906.482	0 - 300	60	yes	

Option:

836.535 Spare battery

Digital calipers with excellent price-performance ratio

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Digit height:
 - measuring range ≤ 100 mm: 7 mm,
 - measuring range ≥ 150 mm: 11 mm.
- On/off switch.
- Reset.
- Power supply: 1 battery (V357).


Item No.	Measuring range/mm	Jaw length mm	Thumb wheel	Price EUR
906.483	0 - 75	30	no	
906.484	0 - 100	30	no	
906.300	0 - 150	40	yes	
906.302	0 - 200	50	yes	
906.304	0 - 300	60	yes	

Left-handed model:

906.299 0 - 150 40 yes

Option:

836.535 Spare battery

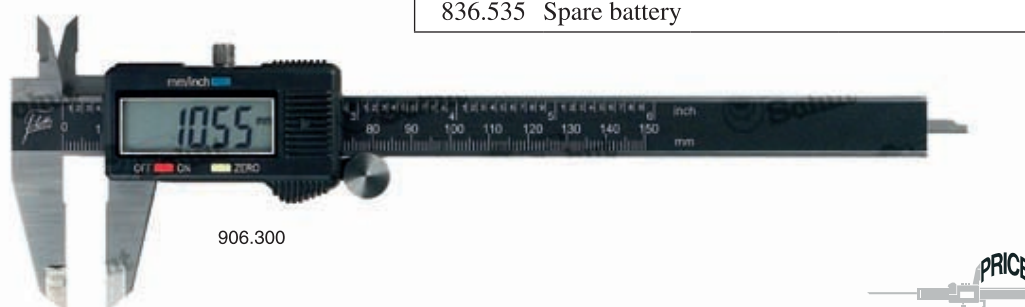


906.300

Absolute digital calipers

Calipers with the absolute digital measuring system. Advantage of this system is that the caliper stores the one-time setting of the absolute zero position until the battery has to be changed. This reduces the chance of measuring errors and enables you to use the caliper without zero setting.

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- ABS/INC switchable.
- Digit height: 10 mm.
- On/off switch.
- Reset.
- Max. measuring speed: 1.5 m/s.
- DIN 862.
- Power supply: 1 battery (V357).

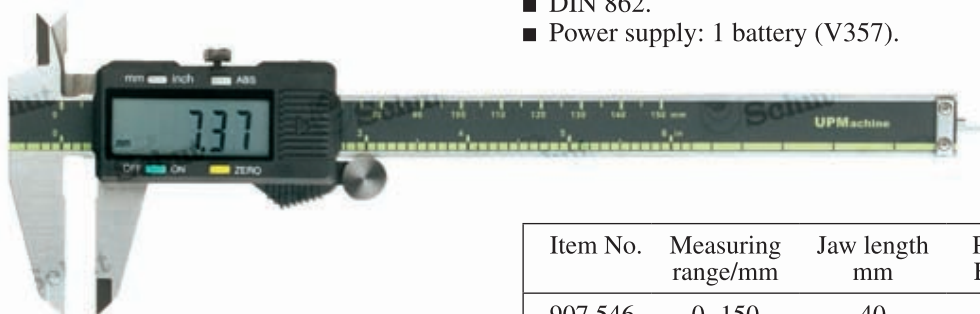


Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.546	0 - 150	40	
907.547	0 - 200	50	
907.548	0 - 300	60	
Option:			
836.535	Spare battery		



Digital calipers

Display blanks after a while, which extends the lifetime of the battery.

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Digit height: 10 mm.
- On/reset switch.
- Automatic switch-off.
- Max. measuring speed: 1.5 m/s.
- DIN 862.
- Power supply: 1 battery (V357).

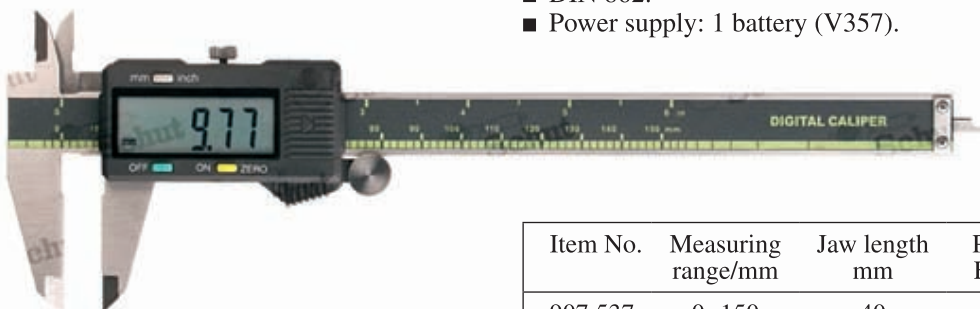

Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.537	0 - 150	40	
907.538	0 - 200	50	
907.539	0 - 300	60	
Option:			
836.535	Spare battery		



Digital calipers with hold function

Digital calipers with a function to hold the display value at any position.

- Measuring range:
0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Digit height: 10 mm.
- On/off switch.
- Reset.
- Hold function.
- Max. measuring speed:
1.5 m/s.
- DIN 862.
- Power supply: 1 battery (V357).




Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.543	0 - 150	40	
907.544	0 - 200	50	
907.545	0 - 300	60	

Digital calipers with min/max function

By keeping the mode button pressed you can hold the minimum and maximum measuring values.

- Measuring range:
0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Digit height: 10 mm.
- On/reset switch.
- Automatic switch-off.
- Min/max function.
- Max. measuring speed:
1.5 m/s.
- DIN 862.
- Power supply: 1 battery (V357).

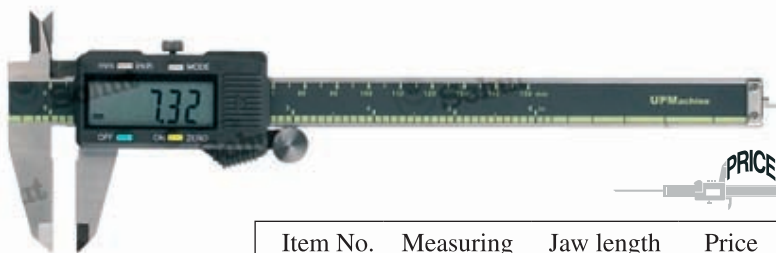


Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.549	0 - 150	40	
907.550	0 - 200	50	
907.551	0 - 300	60	

Digital calipers with tolerance indication

Digital calipers with tolerance function. You can adjust the limits with the TOL key.

- Measuring range:
0 - 300 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Digit height: 10 mm.
- On/off switch.
- Reset.
- Display indication:
▼/OK/▲.
- Max. measuring speed:
1.5 m/s.
- DIN 862.
- Power supply: 1 battery (V357).

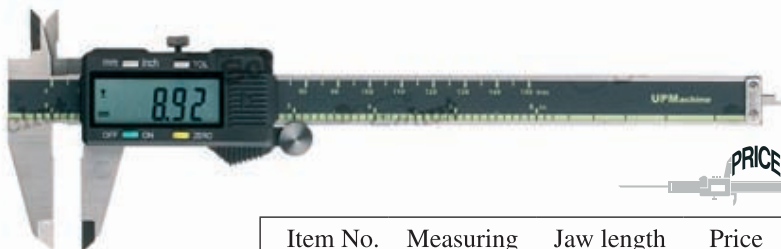


Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.540	0 - 150	40	
907.541	0 - 200	50	
907.542	0 - 300	60	



Digital calipers 0.005 mm

Calipers with a higher resolution and a measuring range up to 300 mm.

- Measuring range: 0 - 300 mm.
- Resolution: **0.005 mm**.
- mm/inch conversion.
- ABS/INC switchable.
- On/off switch.
- Max. measuring speed: 1.5 m/s.
- Flat depth rod.
- DIN 862.
- Power supply: 1 battery (V357).

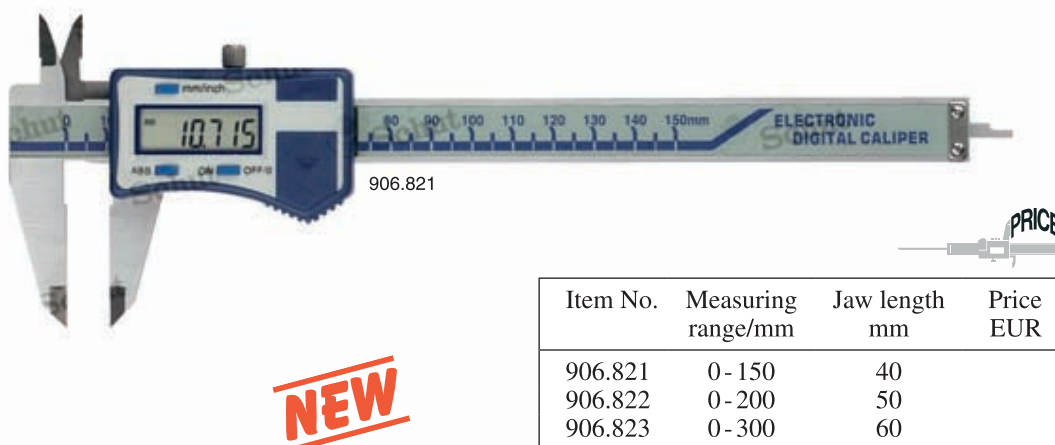

Item No.	Measuring range/mm	Jaw length mm	Price EUR
906.821	0 - 150	40	
906.822	0 - 200	50	
906.823	0 - 300	60	
Option: 836.535 Spare battery			

Digital solar caliper

The solar power supply functions already with a low illumination level.

- Measuring range: 0 - 150 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Jaw length: 40 mm.
- Flat depth rod.




Item No.	Measuring range/mm	Price EUR
906.475	0 - 150	



Digital calipers IP54

These calipers have a protection degree of IP54 and are therefore protected against splash water and resistant to oil and dust. Zero setting at any position. Equipped with thumb wheel and locking screw.

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- Accuracy: ± 0.02 mm.
- mm/inch conversion.
- On/off switch.
- Reset.
- Max. measuring speed: 1.5 m/s.
- Thumb wheel and locking screw.
- Flat depth rod.
- Protection: IP54.
- Resistant to workshop conditions.
- Delivery in a case.
- Power supply: 1 battery (V357).

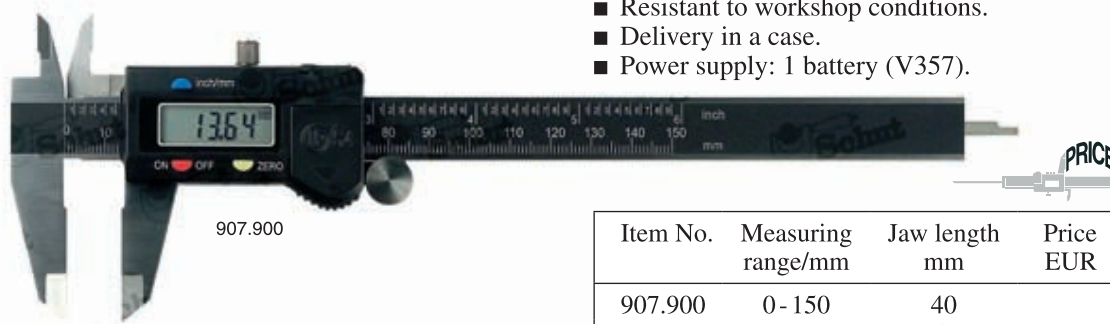

907.900

NEW

Item No.	Measuring range/mm	Jaw length mm	Price EUR
907.900	0 - 150	40	
907.901	0 - 200	50	
907.902	0 - 300	60	
Option:			
836.535	Spare battery		

Digital calipers IP67

These IP67 protected calipers are especially suitable for use in production environments: they are fully protected against dust intrusion and even last temporary immersion.

- Measuring range: 0 - 300 mm.
- Resolution: 0.01 mm.
- Accuracy: ± 0.03 mm.
- mm/inch conversion.
- Automatic switch-off.
- Reset.
- Locking screw.
- Round depth rod.
- Protection: IP67.
- Power supply: 1 battery (CR2032).




908.801

NEW

Item No.	Measuring range/mm	Jaw length mm	Price EUR
908.801	0 - 150	40	
908.802	0 - 200	50	
908.803	0 - 300	60	
Option:			
495.157	Spare battery		

Absolute digital workshop calipers

- Measuring range: 0 - 2000 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- ABS/INC switchable (except 906.460).
- On/off switch.
- Memory for measuring values when the display is switched off.
- Reset/preset.
- Fine adjustment.
- With rounded jaw ends for internal measurements (K):
measuring range 300 mm: from 10 mm,
measuring range ≥ 500 mm: from 20 mm.
- Power supply: 1 battery (V357).

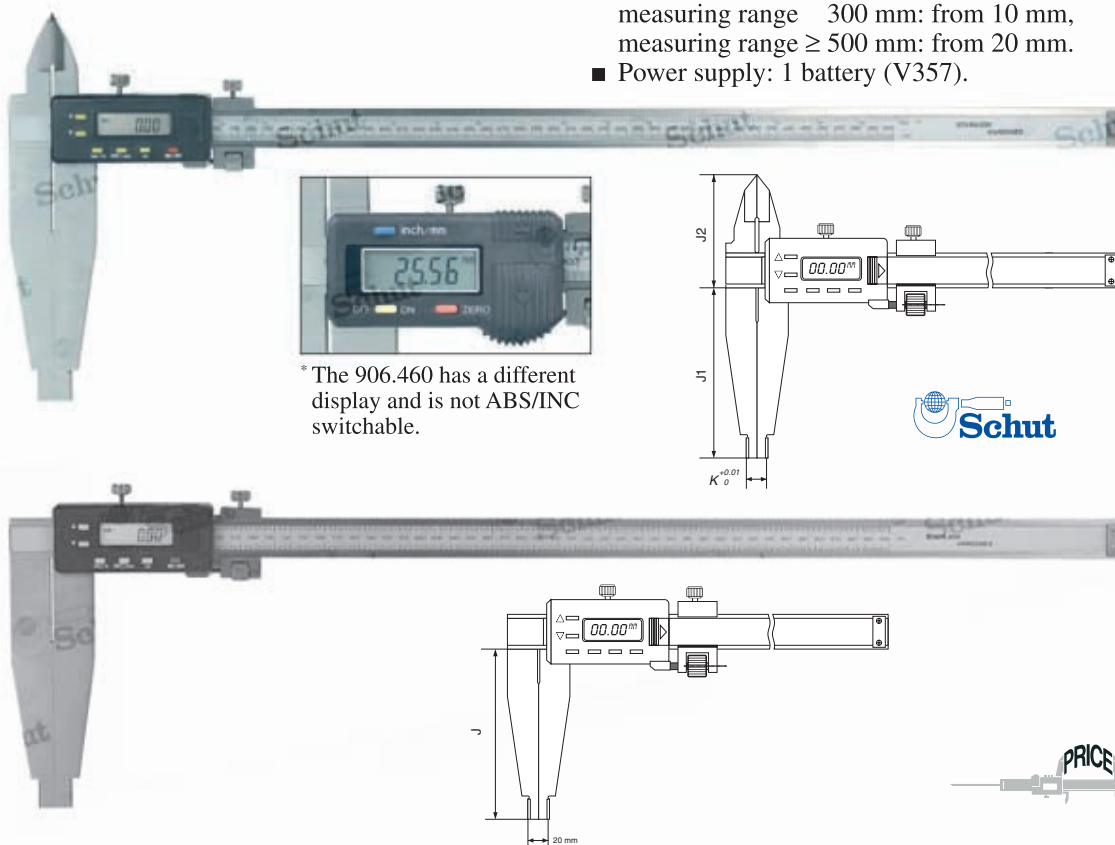

* The 906.460 has a different display and is not ABS/INC switchable.

Calipers with measuring knives

Item No.	Measuring range mm	Jaw length mm		Price EUR
		J1	J2	
906.460*	0 - 300	75	53	
906.461	0 - 500	150	80	
906.462	0 - 1000	200	98	
906.463	0 - 1500	200	98	
906.464	0 - 2000	200	98	

Item No.	Description	Price EUR
Option: 836.535	Spare battery	

Calipers without measuring knives

Item No.	Measuring range/mm	Jaw length J/mm	Price EUR
906.465	0 - 500	150	
906.466	0 - 600	150	
906.467	0 - 1000	200	
906.468	0 - 1500	200	
906.469	0 - 2000	200	
906.470	0 - 500	200	
906.471	0 - 600	200	
906.472	0 - 1000	300	
906.473	0 - 1500	300	
906.474	0 - 2000	300	

Digital carbon workshop calipers IP54

These workshop calipers have a protection degree of IP54 and are therefore protected against splash water and resistant to oil and dust. Equipped with a data output.

- Measuring range: 0 - 3000 mm, internal measurements from 20 mm.
- Resolution: 0.01 mm.
- mm/inch conversion.
- Opto-RS232C data output.
- Two reference memories (REF I and REF II).
- On/off switch.
- Reset/preset.
- Min/max function.
- Hold function.
- Tolerance function.
- Fine adjustment.
- Slider equipped with rounded stainless steel faces, which minimizes guidance errors.
- Hardened steel measuring jaws.
- With measuring knives.
- Protection: IP54 (except for the RS232C data output).
- Resistant to workshop conditions.
- Conforms to factory standard.
- Delivery in a case with an inspection report.
- Power supply: 1 battery (CR2032).
- Also available with special jaw lengths.



837.810



837.810

Item No.	Measuring range/mm	Accuracy/mm	Jaw length/mm	Weight/kg	Price EUR
837.810	0 - 1000	±0.04	150	2.9	
837.811	0 - 1000	±0.04	200	3.2	
837.812	0 - 1500	±0.05	150	3.5	
837.813	0 - 1500	±0.05	200	3.8	
837.814	0 - 2000	±0.07	200	4.2	
837.815	0 - 3000	±0.10	250	5.0	
Options:					
495.157	Spare battery				
781.887	Opto-RS232C cable 9p (2 m)				